


GARDE-BOUE ERMAX ADAPTABLE SUR 650 GLADIUS (MODELE SANS ABS) 2009 → ∞ Pneu d'origine Dunlop Sportmax Qualifier en 160/60 ZR 17

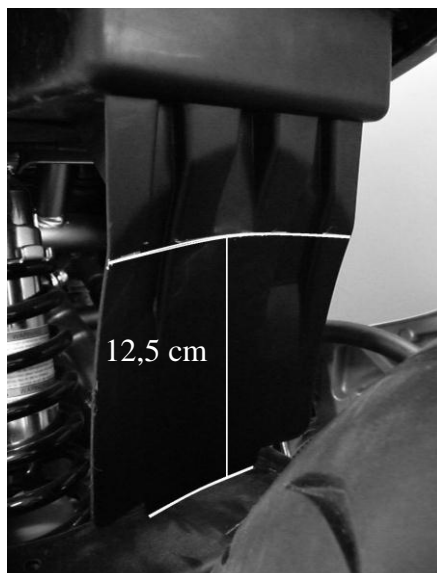

Kit de fixation

- 3 vis BHc 6×15 (grosse tête)
- 1 vis BHc 6×15 (petite tête)
- 4 rondelles plastique Ø6

Montage

- Démontez le carter chaîne d'origine et le support de durite de frein.
- Découpez la bavette comme indiqué sur la photo.
- Positionnez le garde-boue sur la moto et remontez le support de durite de frein. Fixez le garde boue avec la visserie fournie. La vis avec petite tête va sur le trou de fixation de devant.
- Avant d'effectuer un serrage définitif, vérifiez le bon centrage du garde-boue par rapport au pneu.


*** Le garde-boue Ermax n'est pas compatible avec le modèle ABS.**

« ATTENTION »

- * Les pièces peintes et vernies ne sont pas garanties contre les lavages vapeur « haute pression » ou les produits nettoyants agressifs qui peuvent les endommager et décoller le vernis. Nous conseillons d'ailleurs, d'après les données techniques de nos fournisseurs en peinture, d'attendre un mois afin d'obtenir une polymérisation complète du vernis.
- * Tout accessoire monté ne sera plus considéré comme neuf et ne sera **ni repris ni échangé**.
- * Les accessoires Ermax sont conçus pour des **montes d'origine**. Ils ne seront pas garantis s'ils sont utilisés dans d'autres conditions.
- * En raison des tolérances de fabrication des véhicules, indépendantes de notre volonté, certains produits Ermax peuvent nécessiter des ajustements lors de la fixation.
- * Certains pneus, conformes aux standards ETRTO, peuvent être en réalité plus hauts et plus larges que les dimensions gravées sur le pneu (jusqu'à + 10 mm). Ils peuvent être **incompatibles** avec les passages de roue et garde-boue que nous avons conçus avec les pneus montés d'origine et dont les dimensions correspondent à celles gravées sur le pneu.
- * Durcir l'amortisseur arrière lors de conduites chargées ou sur routes bosselées.
- * Les marques de fabricant de motos citées sont indiquées exclusivement comme référence nécessaire à la destination des accessoires Ermax.
- * Attention aux serrages excessifs qui pourraient abîmer ou casser nos accessoires en plastique et les vis en aluminium.

FITTING INSTRUCTIONS

**ERMAX REAR HUGGER ADAPTABLE ON
650 GLADIUS (WITHOUT ABS MODEL) 2009 → ∞**
Original tyre Dunlop Sportmax Qualifier in 160/60 ZR 17

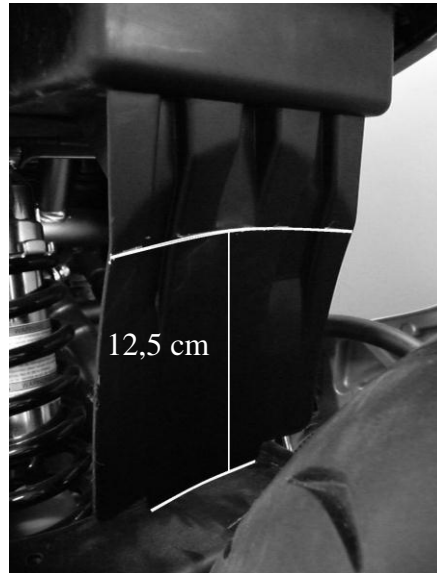

Fitting kit

- 3 BHc 6x15 screws (big head)
- 1 BHc 6x15 screws (little head)
- 4 Ø6 plastic washers

Assembly

- Remove the original chainguard and the holder of the brake hose.
- Cut out the original suspension protection as shown on the photo.
- Place the rear hugger on the motorbike and replace the holder of the brake hose. Fit the rear hugger with the provided screws. The screw with little head is located at the frontal fitting hole.
- Check the rear hugger is well centered on the tyre before tightening definitively.

*** Ermax rear hugger is not compatible with ABS model.**

< CAUTION >

- * Painted and varnished parts are not guaranteed against high pressure steam washes or aggressive cleaning products which can damage them and unstuck the varnish. We advise moreover, according to the technical data of our painting suppliers, **to wait one month** to obtain a complete polymerization of varnish.
- * Accessories gone up on the motorbike will not be any more considered as new and will be **neither retaken nor exchanged**.
- * Ermax accessories are foreseen for **original equipments**. They will not be guaranteed if they are used in others conditions.
- * Due to vehicles made tolerances, beyond our control, some Ermax products might need adjustments to fit.
- * A few tyres, faithful to ETRTO standards, may be in fact bigger and higher than dimensions engraved on the tyre (until + 10 mm). They may be **not compatible** with undertrays and rear huggers which we made with original tyres and whose dimensions correspond to these ones engraved on tyre.
- * Harden the rear shock absorber while drivings with load or on dented roads.
- * The mentioned label of motorbikes's manufacturers are indicated exclusively as a reference to Ermax accessories.
- * Care to excessive clampings which may damage or break our plastic accessories and aluminium screws.